


# GasMultiBloc® Double solenoid valve

## Pre-mount filter

**DUNGS®**  
Combustion Controls

MB-...415  
MB-...420  
DMV-...507  
DMV-...512  
DMV-...520

7.40

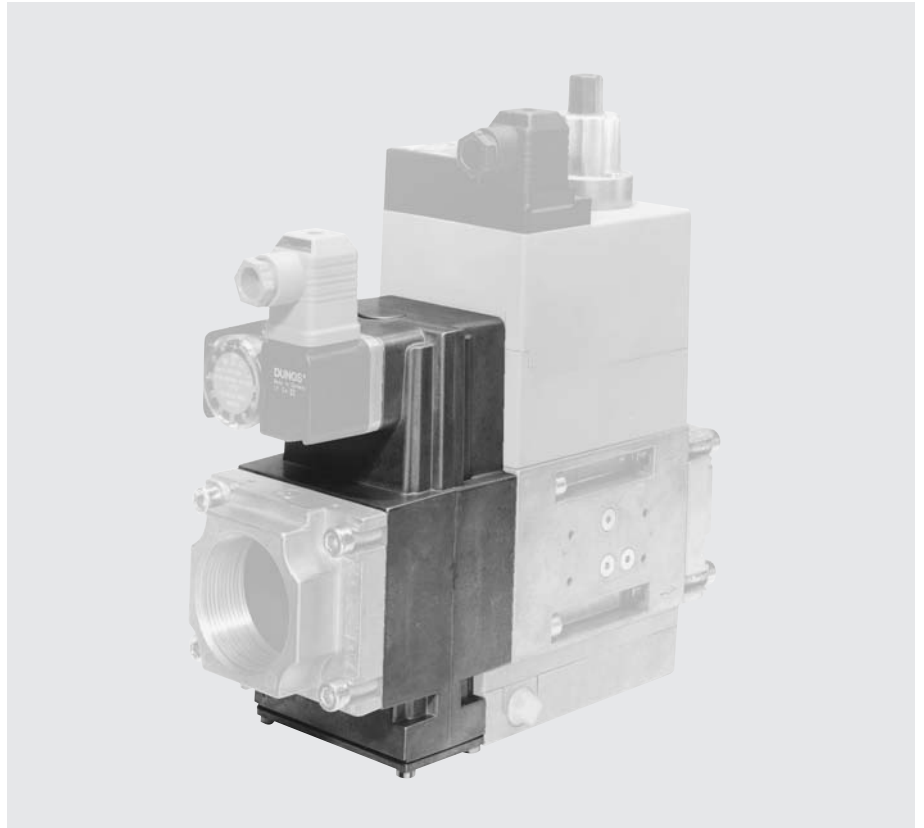

### Technical description

Microfilter for gas pipes with high dust retention capacity for Dungs multiple actuators. Prepared for mounting on:

MB-D...415  
MB-D...420  
MB-ZR...415  
MB-ZR...420  
MB-VEF 415  
MB-VEF 420

DMV-D...507/11  
DMV-D...512/11  
DMV-D...520/11

DMV-ZRD...507/11  
DMV-ZRD...512/11  
DMV-ZRD...520/11


DMV-SE 507/11  
DMV-SE 512/11  
DMV-SE 520/11

DMV-VEF 507/11  
DMV-VEF 512/11  
DMV-VEF 520/11


### Application

Microfilter to protect downstream appliances. Filters are suitable for gases of gas families 1, 2, 3 and other neutral gaseous media.


## Flow characteristic of pre-mount filter

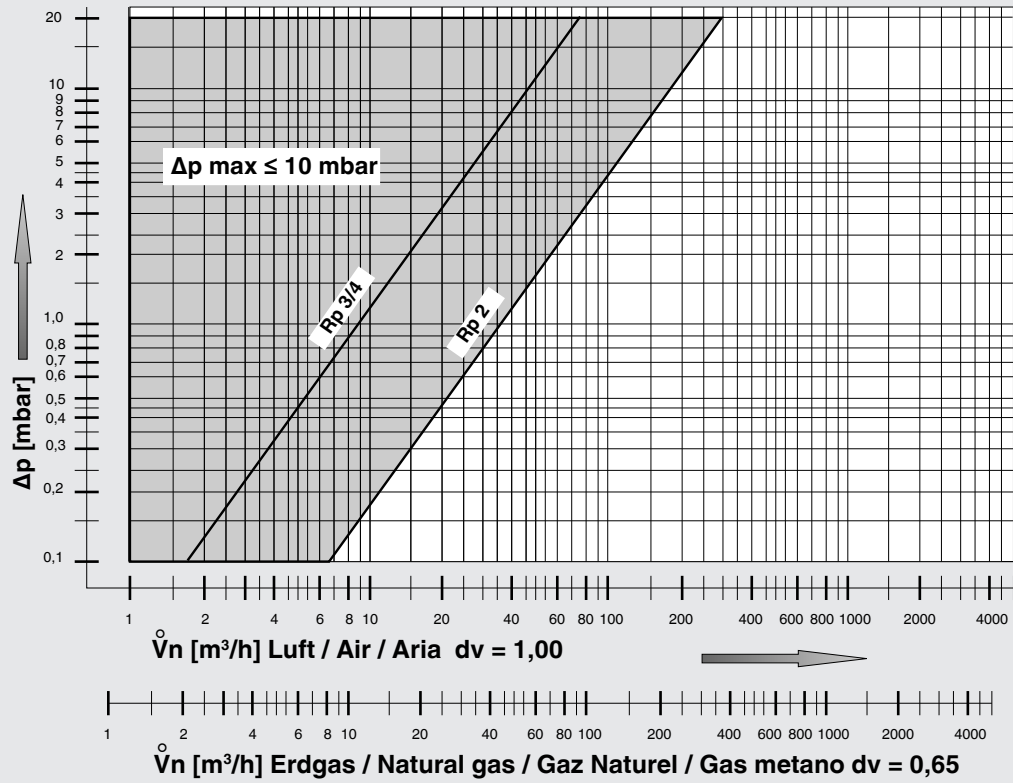


## Flow characteristics of MB-...415 - 420

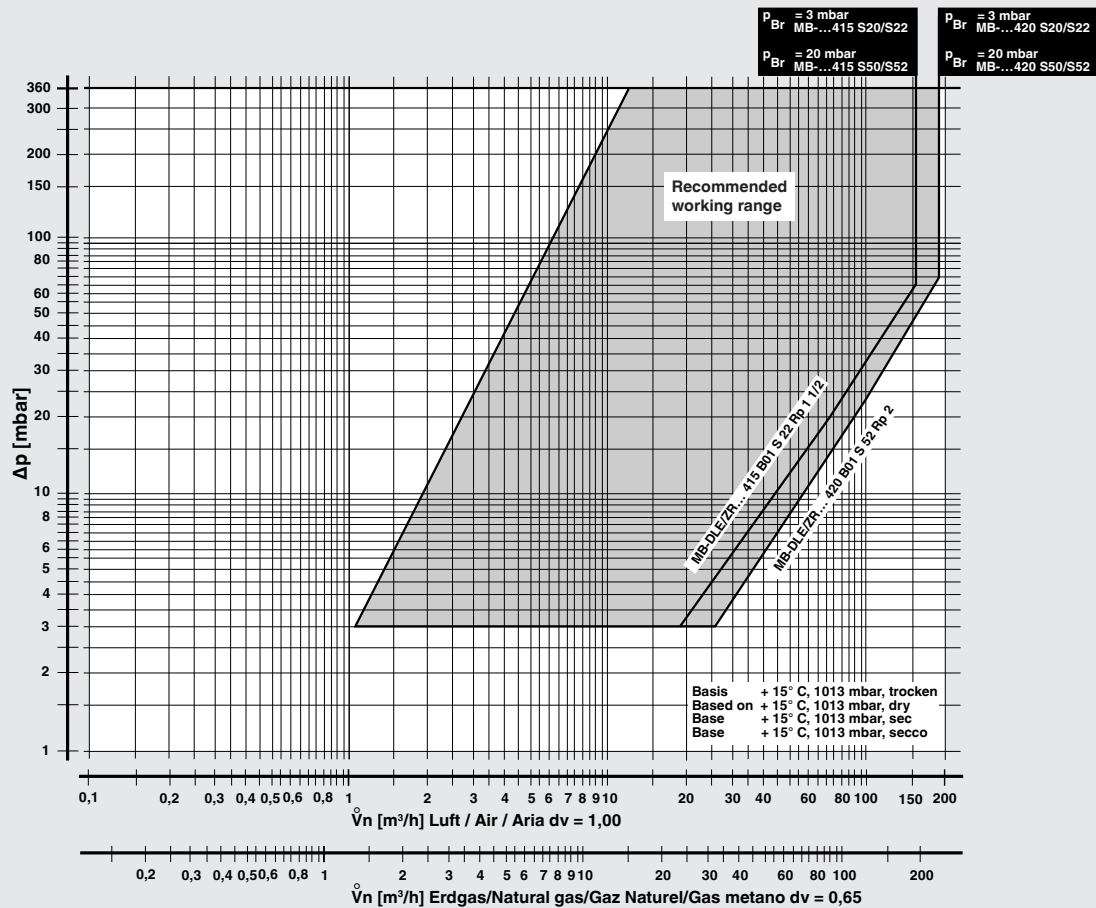

## Flow characteristics of MB-VEF 415 - 420

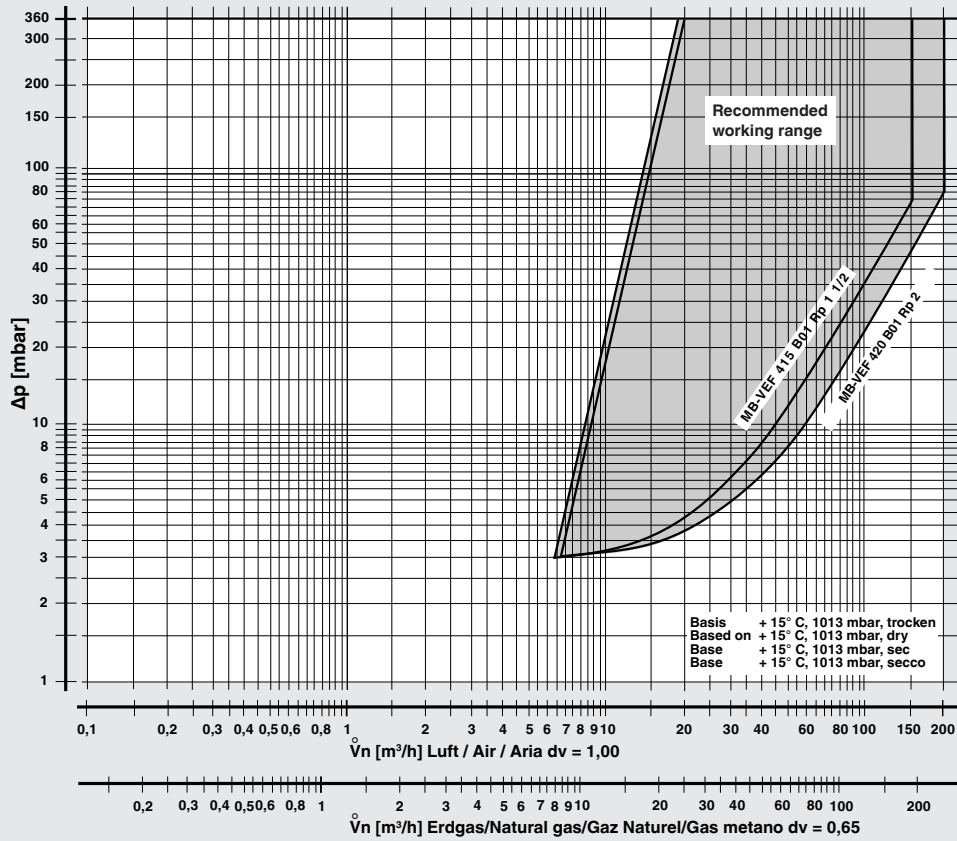

## Flow characteristics of DMV-SE 507 - 520 Flow characteristics of DMV-VEF 507 - 520

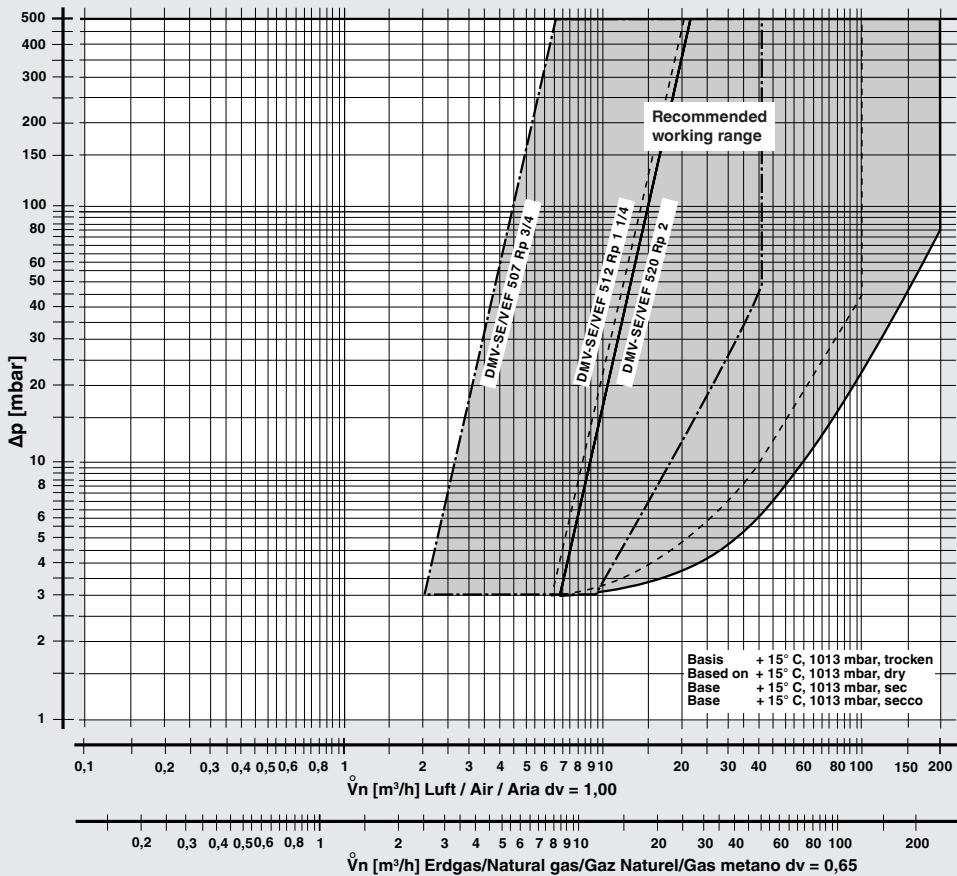


**GasMultiBloc®**  
**Double solenoid valve**

**Pre-mount filter**  
**MB-...415**  
**MB-...420**  
**DMV-...507**  
**DMV-...512**  
**DMV-...520**



**Dimensions [mm]**

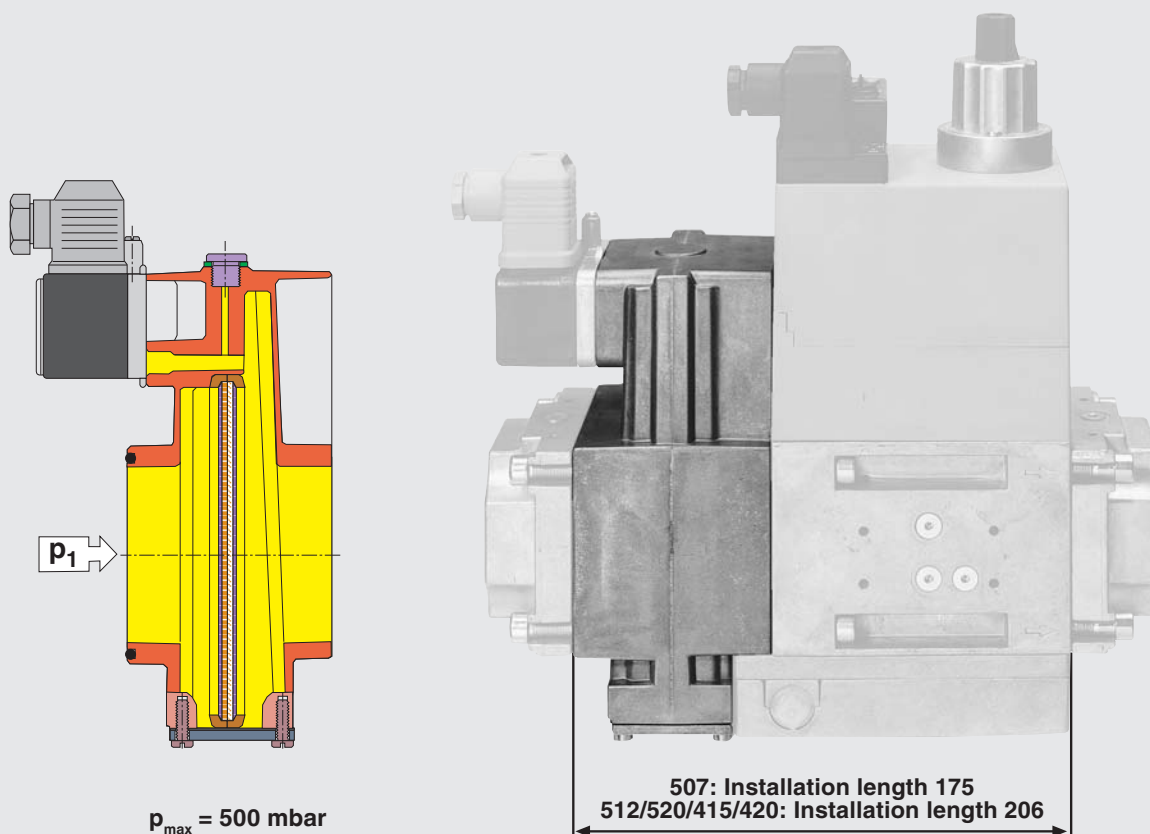

Designation	Order No.	
Pre-mount filter, complete, for Rp 3/4, Rp 1	232 440	Gas pressure switch GW A5 not contained in scope of supply
Spare filter insert	238 653	
Pre-mount filter, complete, for Rp 1 1/2, Rp 2	226 342	
Spare filter insert	226 997	

We reserve the right to make any changes in the interest of technical progress.

**Head Offices and Factory**  
**Karl Dungs GmbH & Co. KG**  
**Siemensstraße 6-10**  
**D-73660 Urbach, Germany**  
**Telephone +49 (0)7181-804-0**  
**Fax +49 (0)7181-804-166**

**Postal address**  
**Karl Dungs GmbH & Co. KG**  
**Postfach 12 29**  
**D-73602 Schorndorf, Germany**  
**e-mail info@dungs.com**  
**Internet www.dungs.com**